

RFLN12S-10 is a two-stage Low Noise Amplifier that operates from 8 - 12 GHz and can be used in low-power X band applications or to drive the high-power amplifier. The amplifier provides 19.6 dB small signal gain and 14 dBm of Output P1dB. The input and output are matched to 50 ohms with on-chip DC blocking capacitors. The device is specifically designed for use in 8 - 12 GHz frequency in point-to-point radios for cellular backhaul Applications, 5G RF transceivers & SATCOM. The technology used to design LNA is 0.1um GaAs pHEMT Process. Results are shown in the datasheet with all parasitic & coupling effects at the desired frequency.

### Features:

- RF Frequency: 8-12 GHz
- Noise Figure of 1.9 dB
- Small Signal Gain of 19.6 dB
- OP1dB of 14 dBm
- OIP3 of 22 dBm
- Biasing: VDD=4V, ID= 62mA
- Die Size: 0.9 mm x 0.9 mm


### Application:

- 5G mobile system.
- Satellite Communication.
- Point-to-point communication system.
- Terrestrial communication system.
- Radar Application.

### Tech Specs:

- Part Number: RFLN12S-10
- Provider: RFIC Solutions Inc.
- Foundry node: 0.1um GaAs pHEMT Win Semiconductors
- Porting: IP can be ported to 65nm Si / CMOS node
- Maturity: IC is fabricated and tested.
- Availability: Now

### Functional Block Diagram:

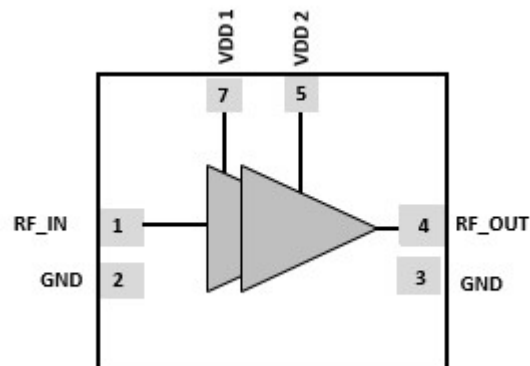

### Deliverables:

- Schematic and Netlist
- Abstract Model (.lib file)
- Layout View(Optional)
- Behavioral model (Circuit & EM simulation)
- Extracted View(Optional)
- GDSII
- DRC, LVS, Antenna report
- Test bench with configuration(Optional)
- Documentation

### Contact Information

Email: smoghe@rficsolutions.com, Tel: (+1) 840 356 8957, (+91) 9022078131, (+91) 8485841789

RFIC confidential property not to be copied or disclosed without prior authorization.

[www.rficsolutions.com](http://www.rficsolutions.com)

AUG 2024